


Darest SHOP

HP - 530T

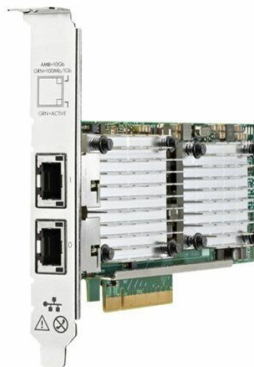

✓ Lieferzeit: 1-2 Tage

CHF **202.95**

CHF **187.74** exkl.

HP 530T - Netzwerkkarte - PCI Express 2.0 x8 - Gigabit LAN, 10 Gigabit LAN - 1000Base-T, 10GBase-T - 2 Anschlüsse - für ProLiant DL320e Gen8, DL360e Gen8, DL385p Gen8, SL270s Gen8, SL4540 Gen8, SL4545 G7

Hersteller	Hewlett-Packard
EAN	886111681372
Hersteller-Nr	656596-B21

Beschreibung

Dimensionen

Formfaktor	Full-Height Low-Profile
------------	----------------------------

Kompatibilität

Kompatibel zu	ProLiant Server Gen8 und Gen9
Kompatible Hersteller	HP

Schnittstellen

Schnittstellen	RJ-45 10GBase-T
Schnittstellengeschwindigkeit	10 Gbit/s

Anschlussart	PCI-Express x8
Netzwerkeigenschaften	
RJ-45 Anschlüsse	2 ×
RJ-45 Geschwindigkeit	10 Gbit/s
Fibre-Channel Anschlüsse	0
Anwendungsbereich	Enterprise
Weitere Informationen	
Weitere Informationen	PCIe, BCM57810S
SFP	
SFP Anschlüsse	0
SFP+ Anschlüsse	0 ×
QSFP+ Anschlüsse	0 ×

Spezifikation

Produktbeschreibung	HPE 530T - Netzwerkadapter - PCIe 2.0 x8 - 10Gb Ethernet
Gerätetyp	Netzwerkadapter
Formfaktor	Plug-in-Karte
Schnittstellentyp (Bustyp)	PCI Express 2.0 x8
Ports	10Gb Ethernet
Verdrahtungstyp	Ethernet 1000Base-T, Ethernet 10GBase-T
Data Link Protocol	1GbE, 10GbE
Prozessor	Broadcom BCM57810S
RAM	256 MB
Produktzertifizierungen	IEEE 802.3, IEEE 802.1Q, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1AX, IEEE 802.1Qbb, IEEE 802.1Qaz, IEEE 802.1Qau, IEEE 802.1Qbg, IEEE 802.2x
Systemanforderungen	SunSoft Solaris 10, Microsoft Windows HPC Server 2008 SP2, Microsoft Windows Small Business Server 2011 Essentials, Microsoft Windows MultiPoint Server 2011, Microsoft Windows Small Business Server 2011, Microsoft Windows Server 2008 (32/64-bits) SP2, Red Hat Enterprise Linux 6.1, Red Hat Enterprise Linux 6.2, Red Hat Enterprise Linux 5.7, SuSE Linux Enterprise Server 10 SP4, Citrix XenServer 6.0, SuSE Linux Enterprise Server 11 SP2, Microsoft Windows Server 2012, Red Hat Enterprise Linux 5.8, Microsoft Windows Server 2008 R2 SP1 (32/64 Bit), Microsoft Windows HPC Server 2008 R2 SP1,

Red Hat Enterprise Linux 5.9, Red Hat Enterprise Linux 6.3, SunSoft Solaris 11, Citrix XenServer 6.1

Entwickelt für	Apollo 4200 Gen10; Nimble Storage dHCI Large Solution with HPE ProLiant DL380 Gen10, Medium Solution with HPE ProLiant DL360 Gen10, Small Solution with HPE ProLiant DL360 Gen10; ProLiant DL180 Gen10, DL360 Gen10, DL380 Gen10, DL388p Gen8, DL560 Gen10, XL170r Gen10, XL190r Gen10; SimpliVity 380 Gen10
----------------	--

Tech. Details

Gerätetyp	Netzwerkadapter
Formfaktor	Plug-in-Karte
Schnittstellentyp (Bustyp)	PCI Express 2.0 x8
Ports	10Gb Ethernet
Anschlussstechnik	Kabelgebunden
Verdrahtungstyp	Ethernet 1000Base-T, Ethernet 10GBase-T
Data Link Protocol	Gigabit Ethernet, 10 Gigabit Ethernet
Leistungsmerkmale	TCP/IP-Offloading, Jumbo-Frames-Support, Team-Unterstützung, PXE-Unterstützung, RSS, gekennzeichnetes VLAN, MSI-X
Produktzertifizierungen	IEEE 802.3, IEEE 802.1Q, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1AX, IEEE 802.1Qbb, IEEE 802.1Qaz, IEEE 802.1Qau, IEEE 802.1Qbg, IEEE 802.2x
Prozessor	Broadcom BCM57810S
RAM	256 MB
Schnittstellen	1 x 10GBase-T - RJ-45
Kompatible Steckplätze	1 x PCI Express 2.0 x8
Kennzeichnung	UL, BSMI, BSMI CNS 13438 Class A, EN55024, EN55022 Klasse A, ICES-003 Klasse A, WEEE, FCC Part 15 A, EN 61000-3-2:2006, EN 61000-3-3:2008
Erforderliches Betriebssystem	SunSoft Solaris 10, Microsoft Windows HPC Server 2008 SP2, Microsoft Windows Small Business Server 2011 Essentials, Microsoft Windows MultiPoint Server 2011, Microsoft Windows Small Business Server 2011, Microsoft Windows Server 2008 (32/64-bits) SP2, Red Hat Enterprise Linux 6.1, Red Hat Enterprise Linux 6.2, Red Hat Enterprise Linux 5.7, SuSE Linux Enterprise Server 10 SP4, Citrix XenServer 6.0, SuSE Linux Enterprise Server 11 SP2, Microsoft Windows Server 2012, Red Hat Enterprise Linux 5.8, Microsoft Windows Server 2008 R2 SP1 (32/64 Bit), Microsoft Windows HPC Server 2008 R2 SP1, Red Hat Enterprise Linux 5.9, Red Hat Enterprise Linux 6.3, SunSoft Solaris 11, Citrix XenServer 6.1
Min Betriebstemperatur	0 °C

Max. 55 °C
Betriebstemperatur

Zulässige 5 - 95 % (nicht kondensierend)
Luftfeuchtigkeit im
Betrieb

Entwickelt für HPE Apollo 4200 Gen10, 4200 Gen10 for HPE Ezmeral Container Platform, 4200 Gen10 for HPE Ezmeral Tracking, 4200 Gen9 for Google | HPE Nimble Storage dHCI Large Solution with HPE ProLiant DL380 Gen10, Medium Solution with HPE ProLiant DL360 Gen10, Small Solution with HPE ProLiant DL360 Gen10 | HPE ProLiant DL120 Gen10, DL180 Gen10, DL180 Gen10 Entry, DL180 Gen10 SMB, DL20 Gen10, DL20 Gen10 Entry, DL20 Gen10 Performance, DL20 Gen10 solution, DL20 Gen9 Solution, DL325 Gen10 Base, DL325 Gen10 Solution, DL360 Gen10 All Flash Server for Weka, DL360 Gen10 Compute Server for Cohesity DataPlatform, DL360 Gen10 Low, DL360 Gen10 Network Choice, DL360 Gen10 Performance for Cohesity DataPlatform, DL360 Gen10 SMB, DL360 Gen10 SMB Network Choice, DL360 Gen10 Solution, DL380 Gen10 All Flash Server for Datera, DL380 Gen10 Entry SMB, DL380 Gen10 for Cohesity DataPlatform, DL380 Gen10 for SAP HANA Compute Block, DL380 Gen10 Hybrid Server for Datera, DL380 Gen10 Network Choice, DL380 Gen10 Network Choice for CTERA, DL380 Gen10 NVMe All Flash Server for Datera, DL380 Gen10 Server for CTERA, DL380 Gen10 SMB, DL380 Gen10 SMB Networking Choice, DL380 Gen10 Solution, DL388 Gen10 Network Choice, DL388p Gen8 Base, DL560 Gen10 for SAP HANA Compute Block, DL580 Gen10 Base, DL580 Gen10 Entry, DL580 Gen10 Performance, ML110 Gen10 Solution, ML30 Gen10, ML30 Gen10 Entry, ML30 Gen10 Performance, ML30 Gen10 Solution, ML30 Gen9 Entry, ML30 Gen9 Solution, ML350 Gen10 High Performance, ML350 Gen10 SMB, ML350 Gen10 Solution, ML350 Gen10 Special Server, XL170r Gen10 24TB Server for Cohesity DataPlatform, XL170r Gen10 36TB Add-on Server for Cohesity DataPlatform, XL170r Gen10 Server for BlueData EPIC, XL190r Gen10 for HPE Ezmeral Container Platform, XL450 Gen10 | HPE SimpliVity 325 Gen10 Node, 380 Gen10 G Node, 380 Gen10 H Node, 380 Gen10 Network Choice G Node, 380 Gen10 Network Choice H Node, 380 Gen10 Node | HPE StoreEasy 1660 Expanded Storage